


Bauform A

Maßbild

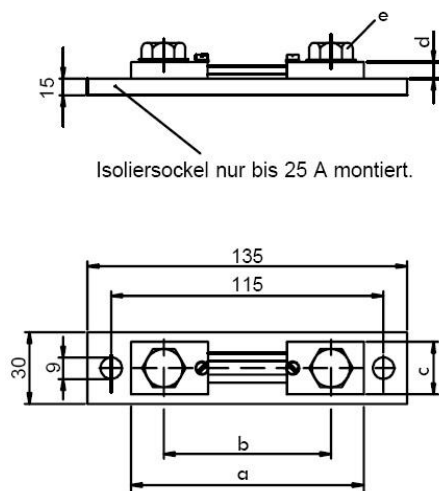


Maße in mm	Spannungsabfall 60 mV		Spannungsabfall 100 mV	
	1 A ... 25 A	30 A ... 200 A	1 A ... 25 A	30 A ... 200 A
a	90	100	100	120
b	80	80	80	100
c	20	20	20	20
d	8	8	8	8
e	M 5	M 8	M 5	M 8

Maße in mm	Spannungsabfall 150 mV		Spannungsabfall 300 mV	
	1 A ... 25 A	30 A ... 200 A	1 A ... 25 A	30 A ... 200 A
a	100	220	100	300
b	80	205	80	350
c	20	25	20	25
d	8	8	8	8
e	M 5	M 8	M 5	M 8

Bauform B

Maßbild

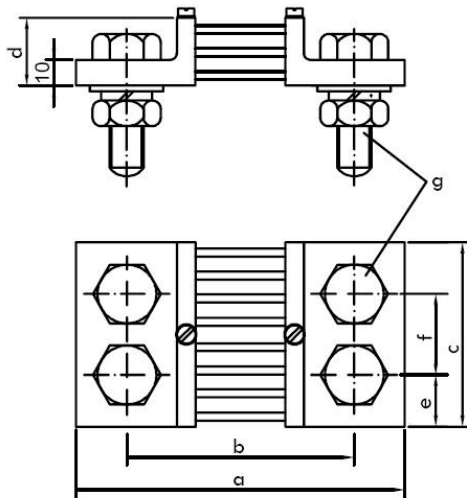


	Spannungsabfall 60 mV					Spannungsabfall 100 mV			
	250 A	400 A 500 A 600 A	1000 A	1500 A	2500 A	250 A	400 A 500 A 600 A	1000 A	1500 A
Maße in mm	300 A	800 A	1200 A	2000 A	3000 A	300 A	800 A	1200 A	2000 A
a	145	145	165	165	165	190	190	210	210
b	105	105	115	115	115	150	150	160	160
c	30	40	60	90	120	30	40	60	120
d	30	30	30	30	30	30	30	30	30
e	15	20	30	21	30	15	20	30	30
f	-	-	-	-	48	60	-	-	-
g	M 12	M 16	M 20	M 16	M 20	M 12	M 16	M 20	M 20
Anzahl der Stromanschlüsse	2x1	2x1	2x1	2x2	2x2	2x2	2x1	2x1	2x1

	Spannungsabfall 150 mV			Spannungsabfall 300 mV		
	250 A	400 A 500 A 600 A	1000 A	250 A	400 A 500 A 600 A	1000 A
Maße in mm	300 A	800 A	1200 A	300 A	800 A	1200 A
a	270	270	290	430	430	440
b	230	230	240	390	390	390
c	30	40	70	30	40	70
d	30	30	30	30	30	30
e	15	20	35	15	20	35
f	60	-	-	-	-	-
g	M 12	M 16	M 20	M 12	M 16	M 20
Anzahl der Stromanschlüsse	2x2	2x1	2x1	2x1	2x1	2x1

Bauform C

Maßbild

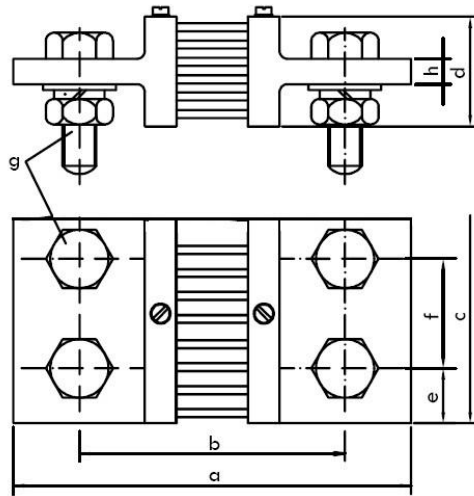

Maße in mm	Spannungsabfall 60 mV				Spannungsabfall 100 mV		
	4000 A 5000 A	6000 A 8000 A	10 000 A	15 000 A	2500 A 3000 A	4000 A 5000 A	6000 A
a	165	175	185	185	210	220	220
b	115	125	135	135	160	170	170
c	120	154	206	310	120	120	154
d	60	130	170	170	60	130	130
e	30	25	25	25	30	30	25
f	60	52	52	52	60	60	52
g	M 20	M 20	M 20	M 20	M 20	M 20	M 20
h	15	25	30	30	15	25	25
Anzahl der Stromanschlüsse	2x2	2x3	2x4	2x6	2x2	2x2	2x3

Maße in mm	Spannungsabfall 150 mV					Spannungsabfall 300 mV			
	1500 A 2000 A	2500 A 3000 A	4000 A 5000 A	6000 A	8000 A 10 000 A	1500 A 2000 A	2500 A 3000 A	4000 A 5000 A	6000 A
a	290	290	300	300	310	449	449	459	459
b	240	240	250	250	260	399	399	409	409
c	90	120	120	154	206	90	120	120	154
d	60	60	130	130	170	60	60	130	130
e	21	30	30	25	25	21	30	30	25
f	48	60	60	52	52	48	60	60	52
g	M 16	M 20	M 20	M 20	M 20	M 16	M 20	M 20	M 20
h	15	15	25	25	30	15	15	25	25
Anzahl der Stromanschlüsse	2x2	2x2	2x2	2x3	2x4	2x2	2x2	2x2	2x3